



VIA EMAIL

May 5, 2021

Mr. Jeffrey Maxted
Alliant Energy – Environmental Services, Generation Operations Support
4902 North Biltmore Lane
Madison, WI 53718-2148

**Re: Hazard Potential Classification Assessment – Revision 1 - §257.73(a)(2)
Alliant Energy – Interstate Power and Light Company
IPL – Ottumwa Generating Station
Ottumwa, Iowa**

Dear Mr. Maxted;

Hard Hat Services (HHS) completed the hazard potential classification assessment for the existing and inactive CCR surface impoundments located at the Interstate Power and Light Company (IPL) Ottumwa Generating Station in Ottumwa, Iowa.

Background Information

In accordance with the requirements set forth in §257.73(a)(2) of the CCR Rule, an owner or operator of an existing or inactive CCR surface impoundment must conduct initial and periodic hazard potential classification assessments of their CCR surface impoundment, except for those existing CCR surface impoundments that are incised. The owner or operator must determine each CCR surface impoundment hazard potential classification through a hazard potential classification assessment.

FEMA (FEMA Publication 333, Federal Guidelines for Dam Safety, Hazard Potential Classification System for Dams, April 2004) developed a “hazard potential” classification in order to classify surface impoundments based on the probable loss of human life, and the impacts on economic, environmental, and lifeline interests in the event of an unintentional release from a surface impoundment. Three hazard potential classification levels are used, as follows:

1. High Hazard Potential – Assigned to surface impoundments where failure or mis-operation will probably cause loss of human life.
2. Significant Hazard Potential – Assigned to surface impoundments where failure or mis-operation results in no probable loss of human life, but can cause economic loss, environmental damage, or disruption of lifeline facilities or can impact other concerns. Significant hazard potential classification dams are often located in predominantly rural

or agricultural areas but could be located in areas with population and significant infrastructure.

3. Low Hazard Potential – Assigned to surface impoundments where failure or mis-operation has no probable loss of human life and low economic and/or environmental losses. Losses are principally limited to the owner’s property.

Facility Specific Information

The IPL – Ottumwa Generating Station (OGS) is located at 20775 Power Plant Road Ottumwa, IA 52501. Figure 1 provides both a topographic map and an aerial of the OGS facility location, with the approximate property boundary of the facility identified. OGS has two CCR surface impoundments, which are identified as follows:

- Existing CCR surface impoundment: OGS Ash Pond
- Inactive CCR surface impoundment: OGS Zero Liquid Discharge Pond

OGS Ash Pond

The OGS Ash Pond is located east of the generating plant on the eastern portion of the site. Since the previous revision of this plan, the sluiced CCR (bottom ash and economizer fly ash) is no longer directed to the OGS Ash Pond. The bottom ash sluicing ceased in the Fall of 2020, while the dry ash handling system was placed into service in December of 2020. Currently, the OGS Ash Pond only receives non-CCR influent flows from the generating plant floor drains, oil/water separator, boiler blow down water, solid contact unit sludge, recirculating media sanitary treatment plant, and surface water runoff from the generating site proper.

The wastewater influents are generally directed eastward within the impoundment and discharge through the facility’s National Pollution Discharge Elimination System (NPDES) Outfall 001, located in the northeast corner of the OGS Ash Pond. NPDES Outfall 001 consists of a concrete discharge structure that includes a Parshall flume and instrumentation to measure the flow of the discharged water. The water flows through the NPDES Outfall 001 and discharges into an unnamed creek. The unnamed creek flows into the Des Moines River downstream of the water intake structure and before the confluence of Middle Avery Creek.

The McNeese Wildlife Area is located south of the OGS Ash Pond. The wildlife area is described by the Wapello County conservation board as a small wildlife area (14 acres) located between County Road H21 and the Alliant Energy Power Plant. The area consists of mixed hardwoods, red cedar and a large open roadside area. It is stated to be an excellent bird watching site.

Within the wildlife area, the U.S Fish and Wildlife Service National Wetlands Inventory indicates that there is a 0.43 acre of “Freshwater Forested/Shrub Wetland” (classification code of PFO1A). The October 15, 2020 Location Restriction Compliance Demonstration identifies that the OGS Ash Pond is not located in wetlands as defined by 40 CFR 232.2.

The surface area of the OGS Ash Pond is approximately 18 acres and has an embankment height of approximately 22 feet from the crest to the toe of the downstream slope. The interior storage

depth of the OGS Ash Pond is approximately 20 feet. As stated in the 2020 Annual Inspection, the total volume of impounded CCR and water within the OGS Ash Seal Pond is approximately 548,000 cubic yards.

OGS Zero Liquid Discharge Pond

The OGS Zero Liquid Discharge (ZLD) Pond is located northeast of the generating plant on the eastern portion of the site and north of the OGS Ash Pond. The OGS ZLD Pond historically received influent flows from the generating plant that consisted of boiler wash water, air heater wash, turbine chemical cleaning water, and boiler chemical cleaning water. Presently, the OGS ZLD Pond only receives storm water runoff from the surrounding area, which includes the inactive C-stone pile (hydrated fly ash) located west of the surface impoundment, as well as occasional storm water runoff from the coal pile storage area. One 24-inch diameter high-density polyethylene culvert connects the coal pile runoff pond to the OGS ZLD Pond. The culvert is used as an emergency overflow to route storm water from the coal pile runoff Pond into the OGS ZLD Pond.

The OGS ZLD Pond does not discharge through any regulated outfall. Two 48-inch diameter concrete culverts, located along the south embankment, previously connected the OGS ZLD Pond to the OGS Ash Pond prior to being permanently sealed off with concrete.

East of the OGS ZLD Pond, the U.S Fish and Wildlife Service National Wetlands Inventory indicates that there is 6.71 acres of “Freshwater Forested/Shrub Wetland” (classification code of PFO1A). The October 15, 2020 Location Restriction Compliance Demonstration identifies that the OGS ZLD Pond is not located in wetlands as defined by 40 CFR 232.2.

The OGS ZLD Pond covers a surface area of approximately 17 acres and has an embankment height of approximately 22 feet from crest to toe of the downstream slope. The interior storage depth of the OGS ZLD Pond is approximately 20 feet. As stated in the 2020 Annual Inspection, the OGS ZLD Pond has a total storage capacity of approximately 516,000 cubic yards.

Hazard Potential Classification

Each CCR surface impoundment has been assigned a hazard potential classification, as identified below.

OGS Ash Pond

OGS Ash Pond has been assigned a **Low Hazard Potential** classification. Mis-operation or failure will likely not result in loss of life as there are no occupied buildings or residences located in the immediate vicinity of the CCR surface impoundment. IPL owns most the property surrounding the OGS Ash Pond which includes approximately 750 feet between the impoundment and the Des Moines River. However, IPL does not own property along Middle Avery Creek. A release to the north would be contained within the OGS ZLD Pond. A release to the east and south would impact Middle Avery Creek. In all cases, a release from the surface impoundment would principally be limited to the facility property and there would likely be low economic losses and environmental damages.

OGS Zero Liquid Discharge Pond

OGS ZLD Pond has been assigned a **Low Hazard Potential** classification. Mis-operation or failure will likely not result in loss of life as there are no occupied buildings or residences located in the immediate vicinity of the CCR surface impoundment. IPL owns the property surrounding the OGS ZLD Pond which includes approximately 750 feet between the impoundment and the Des Moines River. The west portion of the impoundment is incised. A release to the north would be contained within the coal pile runoff pond. A release to the south would be contained within the OGS Ash Pond. A release to the east would impact the land between the impoundment and Des Moines River. In all cases, a release from the surface impoundment would principally be limited to the facility property and there would likely be low economic losses and environmental damages.

Qualified Professional Engineer Certification

To meet the requirements of 40 CFR 257.73(a)(2)(ii), I Mark W. Loerop hereby certify that I am a licensed Professional Engineer in the State of Iowa; and that, to the best of my knowledge, all information contained in this document is correct and the document was prepared in compliance with all applicable requirements in 40 CFR 257.73(a)(2).



By: *Mark Loerop*
Name: MARK LOEROP
Date: MAY 5, 2021

cc: Tony Morse, Alliant Energy


att: Figure 1 – Facility Location Map
Figure 2 – Wetland Location Map

MWL/mwl/RAS


<https://hardhatinc.sharepoint.com/Shared Documents/Projects/154 - Alliant Energy/154.018 - CCR Projects/024 - 2021 CCR Work/003 - OGS/Haz Pot Class/OGS Hazard Potential Analysis 2021 - FINAL.docx>

Historical Topo Map

2013

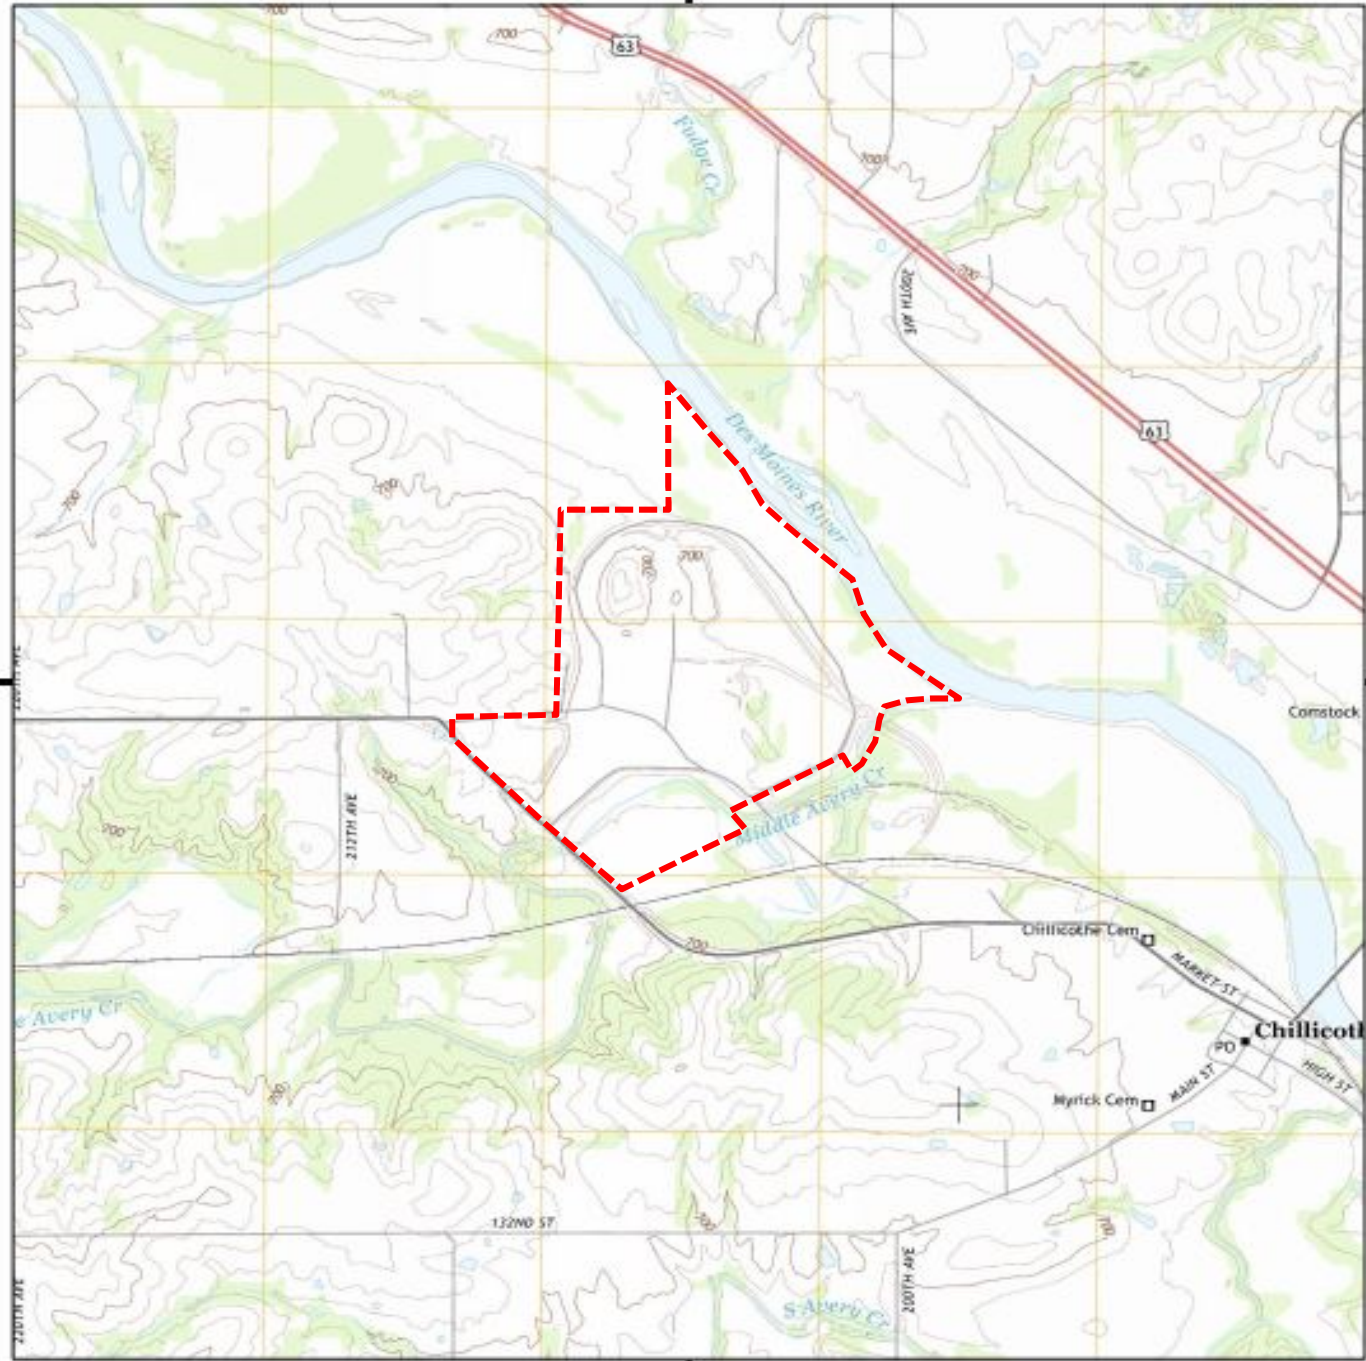


This report includes information from the following map sheet(s).

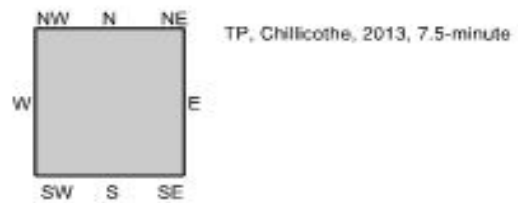

SITE NAME: Otumwa Generating Station
 ADDRESS: 20775 Power Plant Road
 Otumwa, IA 52501
 CLIENT: Environmental Site Assessors

Historical Aerial Photo 4/13/2016

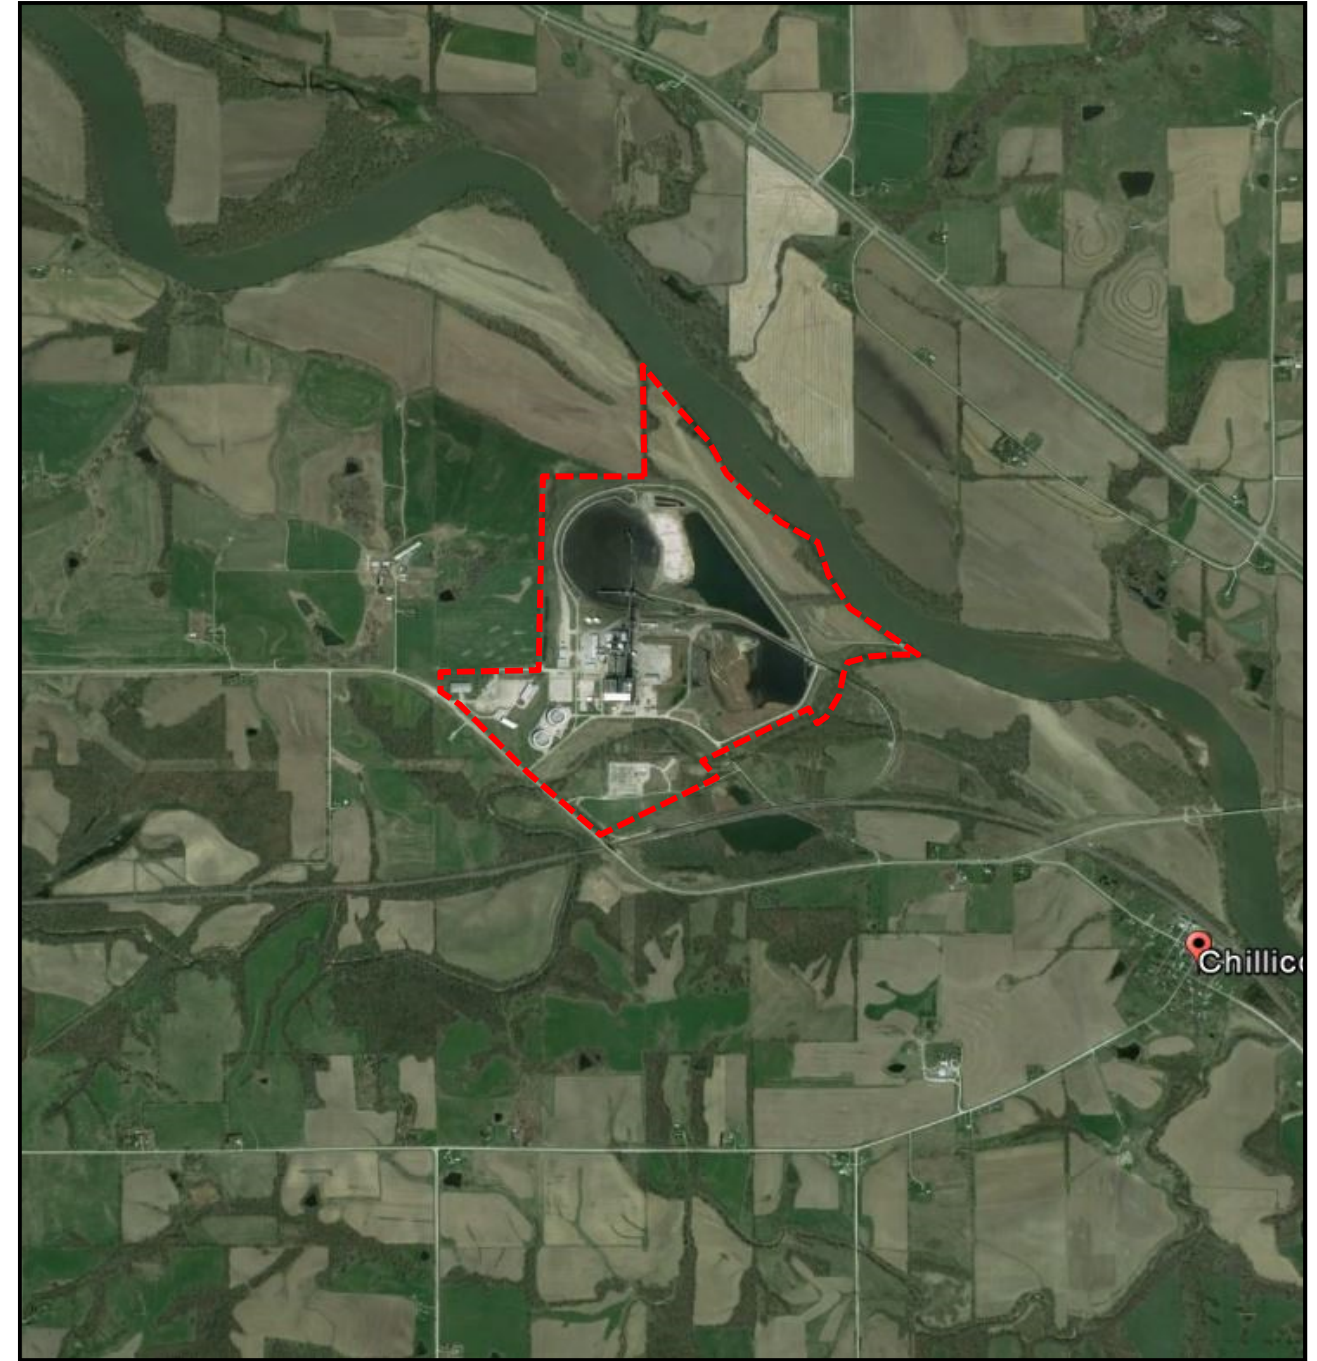


----- Approximate Property Boundary



HARD HAT SERVICESTM
 Engineering, Construction and Management Solutions

Site Location
 Otumwa Generating Station
 Intersate Power and Light Company

Drawing
Figure 1
 Date
 7/12/2016

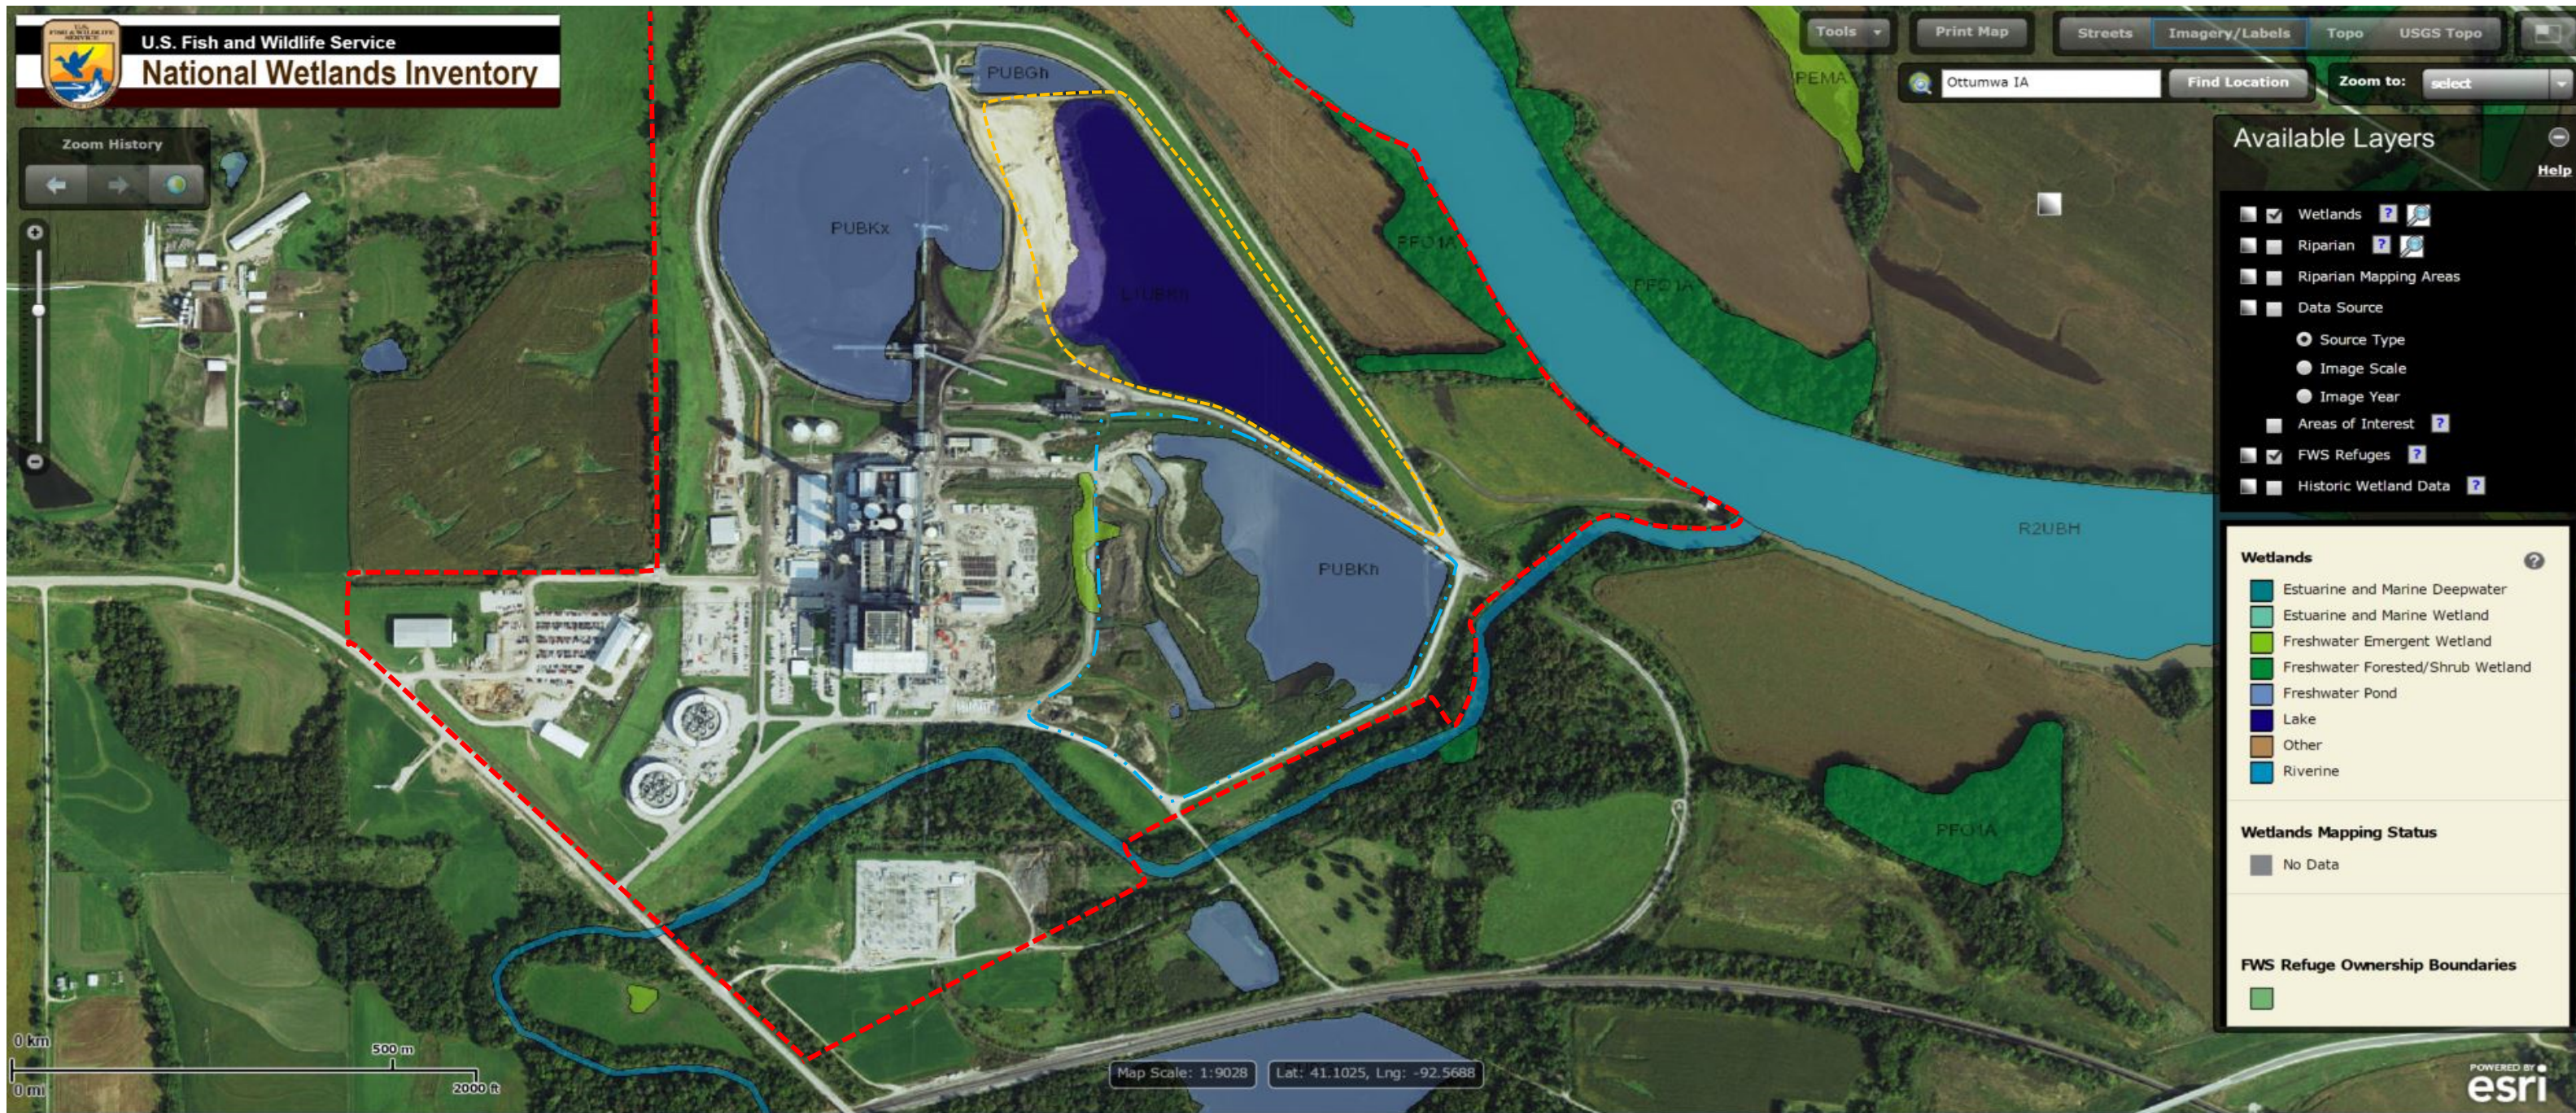

- - - Approximate Property Boundary
- - - OGS Ash Pond
- - - OGS ZLD Pond



Wetland Location Map
 Ottumwa Generating Station
 Intersate Power and Light Company

Drawing
Figure 2
 Date
 7/12/2016